


Fact Sheet

Pile Cloth Filtration with Standard Pile Media

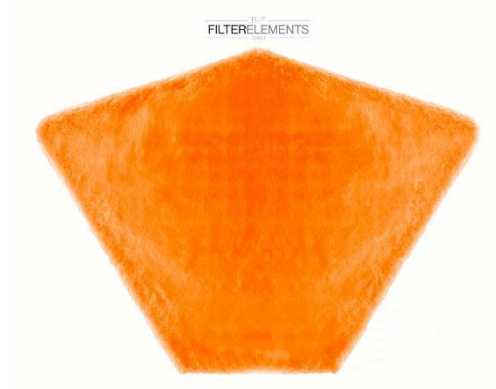

MODE OF LOADING	TSS inlet to filter	Filtration speed	Solids loading rate	TSS effluent from filter	Separation efficiency
	mg/l	m/h	g/m ² *h	mg/l	%
LOW	24,75	7,38	183	1,73	93
NORMAL	41,5	9,84	408	3,1	93
STRESSFULL	76,7	9,69	743	3,8	95
EXTREME	245	5,97	1465	12	95

Pile Fiber Type	PA staple fibre
Support Fiber Type	PET Mono-/Multifilament
Colour	orange
Weight (g/m ²)	720
Thickness (mm)	15,5
Particle Retention	≥ 10 micron
Country of Origin	Germany

CONTACT

R+F FilterElements GmbH
 Wollenweberstraße 25
 31134 Hildesheim
 Germany

Christopher Franke
 c.franke@filter-elements.eu
 Sales & Marketing

Anna Rippel
 a.rippel@filter-elements.eu
 Product Development

Website
www.filter-elements.eu